



BIGSOLAR

Λ. Νάτο 100, 19300 Ασπρόπυργος

Τηλ: 210 5509090

Fax: 210 5594559

E-mail: info@bigsolar.gr

Web: www.bigsolar.gr

ΦΩΤΙΣΤΙΚΟ ΑΣΦΑΛΕΙΑΣ LED 3W



Technical Specifications

Code	BSL 0686/00239
ΤΑΣΗ ΤΡΟΦΟΔΟΣΙΑΣ	220-240V AC/50-60Hz
ΜΕΓΙΣΤΗ ΚΑΤΑΝΑΛΩΣΗ ΙΣΧΥΟΣ	3W/3.5VA
ΜΠΑΤΑΡΙΕΣ (Ni-Cd)	3.6V/1Ah
ΕΝΔΕΙΚΤΙΚΑ-ΧΕΙΡΙΣΤΗΡΙΟ	Ενδεικτικό LED charge, πλήκτρο ελέγχου (TEST)
ΧΡΟΝΟΣ ΦΟΡΤΙΣΗΣ	24 ώρες
ΕΛΑΧΙΣΤΗ ΑΥΤΟΝΟΜΙΑ	3 ώρες
ΦΩΤΕΙΝΗ ΠΗΓΗ	12 LEDs
ΦΩΤΕΙΝΟΤΗΤΑ (230V / ΕΦΕΔΡΕΙΑΣ)	38lm/100lm
ΒΑΘΜΟΣ ΠΡΟΣΤΑΣΙΑΣ ΠΕΡΙΒΛΗΜΑΤΟΣ	IP42
ΚΑΤΑΣΚΕΥΑΖΕΤΑΙ ΣΥΜΦΩΝΑ ΜΕ	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3
ΠΕΡΙΟΧΗ ΘΕΡΜΟΚΡΑΣΙΑΣ ΛΕΙΤΟΥΡΓΙΑΣ	5° έως 40° C
ΣΧΕΤΙΚΗ ΥΓΡΑΣΙΑ	μέχρι 95%
ΥΛΙΚΟ ΚΑΤΑΣΚΕΥΗΣ	ABS/PC, PC
ΕΞΩΤΕΡΙΚΕΣ ΔΙΑΣΤΑΣΕΙΣ	240 x 90 x 44 mm
ΤΥΠΙΚΟ ΒΑΡΟΣ	350gr
ΕΓΓΥΗΣΗ	3 χρόνια (1 χρόνο για την μπαταρία)

Μεγάλη **και** στην εξοικονόμηση ενέργειας



BIGSOLAR

Λ. Νάτο 100, 19300 Ασπρόπυργος


Τηλ: 210 5509090

Fax: 210 5594559

E-mail: info@bigsolar.gr

Web: www.bigsolar.gr


Installation instructions




- 1 Dismantle the device carefully by using a flat bladed screwdriver.



- 2 Pass the mains cables through the hole (point A) and secure it with a suitable bracket (not included) to ensure immobilization of the cable at a distance of no more than 5cm from the luminaire's cable entry. **ATTENTION!!** To maintain the IP rating, the outer diameter of the power cable must be at least 8.2 mm².

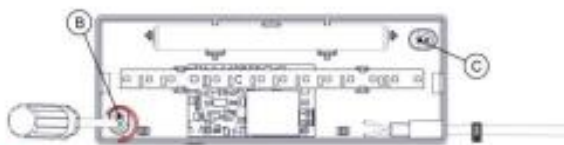

- 3 Mount the plastic base on the wall (the test button must be facing downwards) using the included mounting accessories in points B and C.

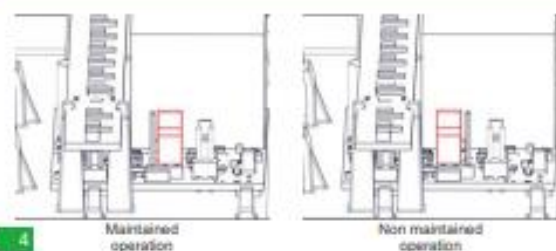


4

Maintained operation


Non maintained operation



- 5 Connect the mains cables to the terminal block.



- 6 Connect the battery's cable with the appropriate terminal.



- 7 Refit carefully the removed plastic parts and power on the device.

NOTE!!

After finishing the installation you must power the luminaire for at least 24 hours in order to completely charge the battery. The rated autonomy duration can be achieved after that time.

Accessory for Suspended Ceiling



The luminaire can be installed in a suspended ceiling, after the request of the necessary accessories.

A-3008 (927300800) Base for recessed mounting on suspended ceiling (A-3018 Suspended ceiling mounting springs are included).

Μεγάλη **και** στην εξοικονόμηση ενέργειας