




BENY

Datasheet



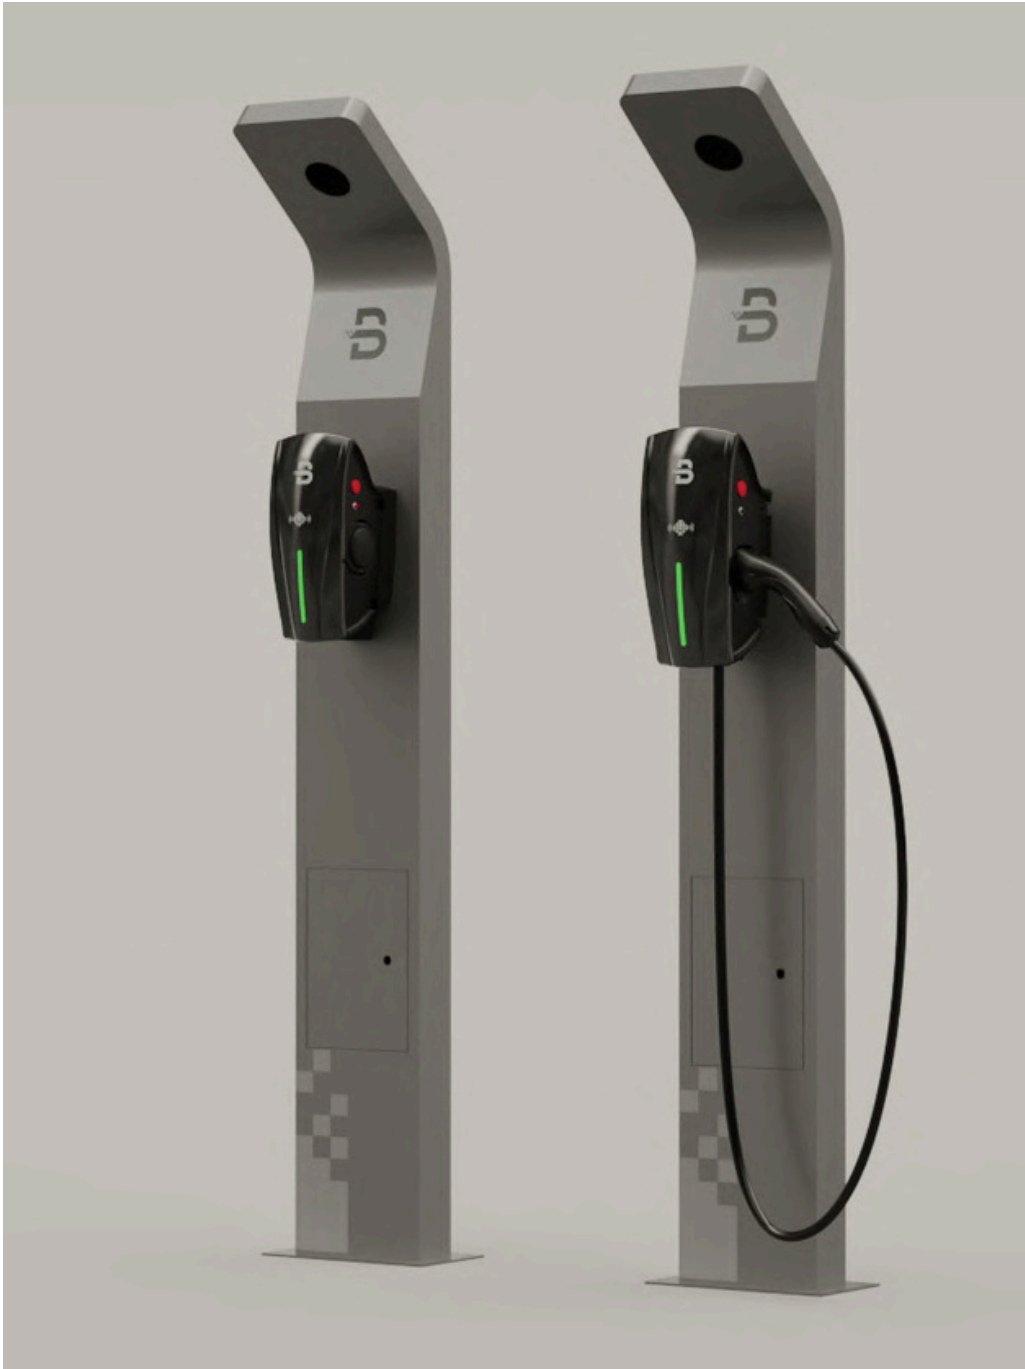

Code

0664/00016

Categorization	Tethered
Maximum Power	22kW
Input Voltage / Output voltage	AC400 3-Phase
Input Frequency	50/60Hz
Meter	Built-in metering chip + external MID meter (optional)
Display	LED Lights
RFID	Yes
DLB	No
Wi-Fi	Yes
Ethernet	Yes
Bluetooth	Yes
Over Voltage & Under Voltage Protection	Yes
Emergency Stop	Yes
Over Current Protection	Yes
CP Signal Short Circuit Protection	Yes
Over Temperature Protection	Yes
Lightning Protection	Yes
Contactor Adhesion Protection	Yes
Protection Degree	IP65
Efficiency	about 100%
Working humidity	95% non-condensing



Environment Temperature	-25°C~+55°C
Storage temperature	-40°C~+85°C
Maximum Altitude	<2000m
Input Current	32A
Socket Type	/
Maximum Output Current	32A
Cable length	6 m (Supports customization of other lengths)
Standards	IEC61851-1, IEC61851-21-2
User management	Bluetooth / Wifi / Smart APP
Communication interface	4G \ Wireless \ LAN Port
Communication protocol	OCPP1.6-J
Starting	Auto-start standard / RFID card