

Driver Brand



Certificates




Μεγάλη **και** στην εξοικονόμηση ενέργειας


Technical Specifications

Model	Big Solar LED Streetlight
Model Code	BSL 0638/00461
Wattage	40W
Lumens	6000Lm
Efficiency	150Lm/W
Driver Efficiency	>90%
CRI (Ra)	>70 Ra
CCT	5000K
Adjustable Angle	-15 D - + 15 D
Light Distribution	Type I Type II Type III Type IV
Working Voltage	100 – 277V AC
Frequency	50Hz – 60Hz
IP Rating	IP66
Lifetime	> 60.000h
Power Factor	>0.9
Overvoltage Protection	10KV
Working Temperature	-30°C - +45°C
IK Protection	IK 09
Class	I (Optional II)
Installation	Bracket or Post Top
Material	Die Cat Aluminum
Dimmable	1 – 10V
Shorting Cup	7 Pin NEMA Shocked (Optional)
Paint Method	Electrostatic
Weight	4,3 Kg
Safety Switch	Knife Type
Maintenance	Easy Click Open
Warranty	5 Years

Dimensions

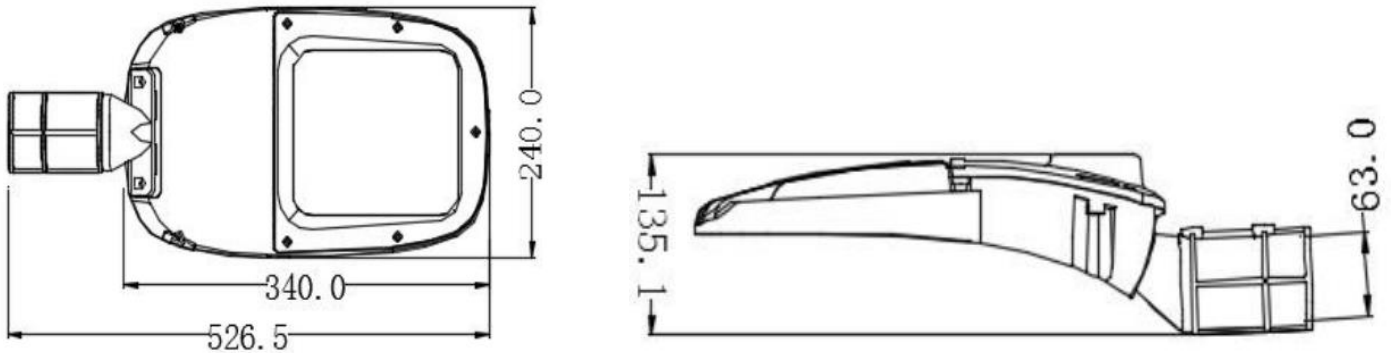

Distribution Curve

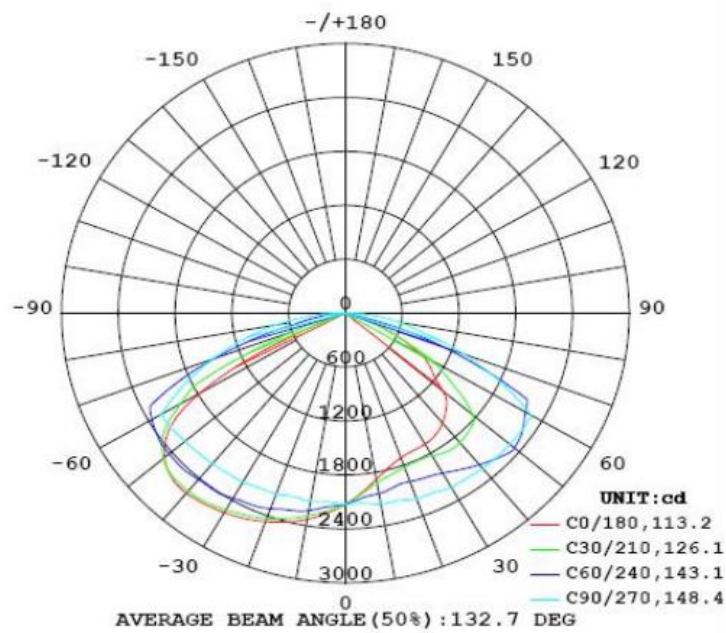

Adjustable Bracket and Click Open



Loose screws ① to fix the fixture on Pole, then tighten screws



The angle of the adaptor can be adjusted by loosening screws ②




If you want to replace driver, just open driver box through the buckle as the direction of above photo shown.



Dimmable Version (7 Pin NEMA Socked) (Optional)



Installation Diagram

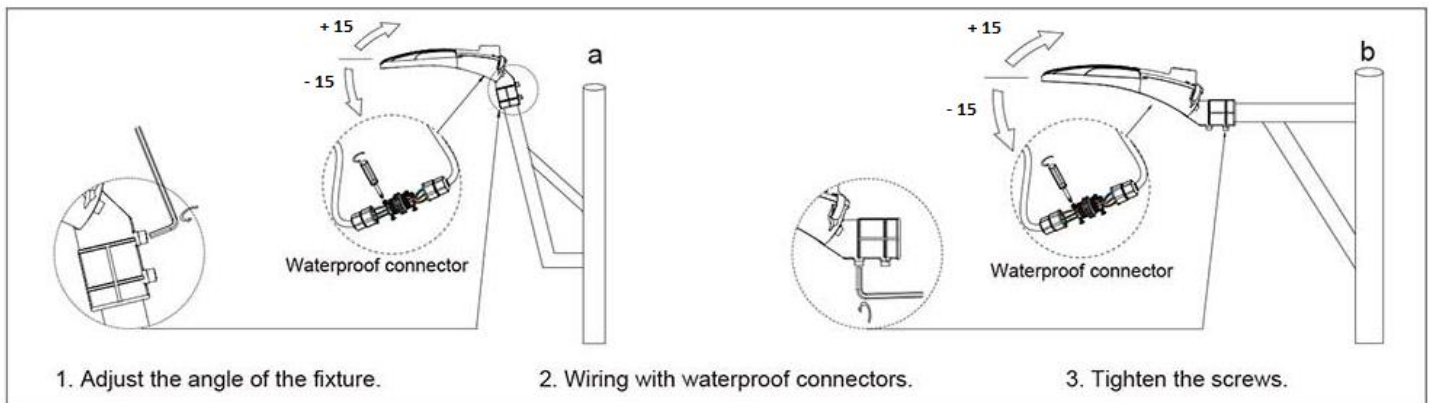

Wire Diagram

