

### LED Round Panel Light 18W



### Technical Specifications

|                           |             |
|---------------------------|-------------|
| <b>Model Code</b>         | 0635/02783  |
| <b>Wattage</b>            | 18W         |
| <b>Lumens</b>             | 1800Lm      |
| <b>Efficiency</b>         | >100Lm/W    |
| <b>CRI (Ra)</b>           | >80 Ra      |
| <b>CCT</b>                | 5000K       |
| <b>Working Voltage</b>    | 220-240V    |
| <b>IP Rating</b>          | IP20        |
| <b>Power Factor</b>       | >0.5        |
| <b>Weight</b>             | 0,35 Kg     |
| <b>Driver</b>             | Lifud       |
| <b>Flickering Free</b>    | < 5%        |
| <b>Warranty</b>           | 3 Years     |
| <b>Color</b>              | White       |
| <b>Dimensions</b>         | Φ 200X10mm  |
| <b>Recessing diameter</b> | 18,5mm      |
| <b>Certificates</b>       | CE standard |



**BIGSOLAR**

Λ. Νάτο 100, 19300 Ασπρόπυργος


**Τηλ:** 210 5509090

**Fax:** 210 5594559

**E-mail:** [info@bigsolar.gr](mailto:info@bigsolar.gr)

**Web:** [www.bigsolar.gr](http://www.bigsolar.gr)


## User Manual

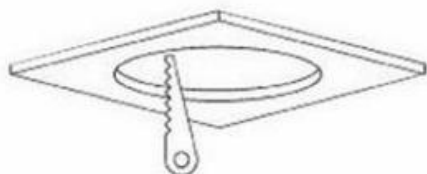

1. According to the cut size to cut the ceiling hole.



3. Put the panel light inside the ceiling hole.

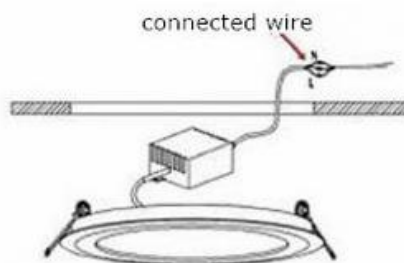

2. Cut off power, the driver wire connected with ceiling wire.



4. Install finishing.

Μεγάλη **και** στην εξοικονόμηση ενέργειας