




# BENY

## Datasheet

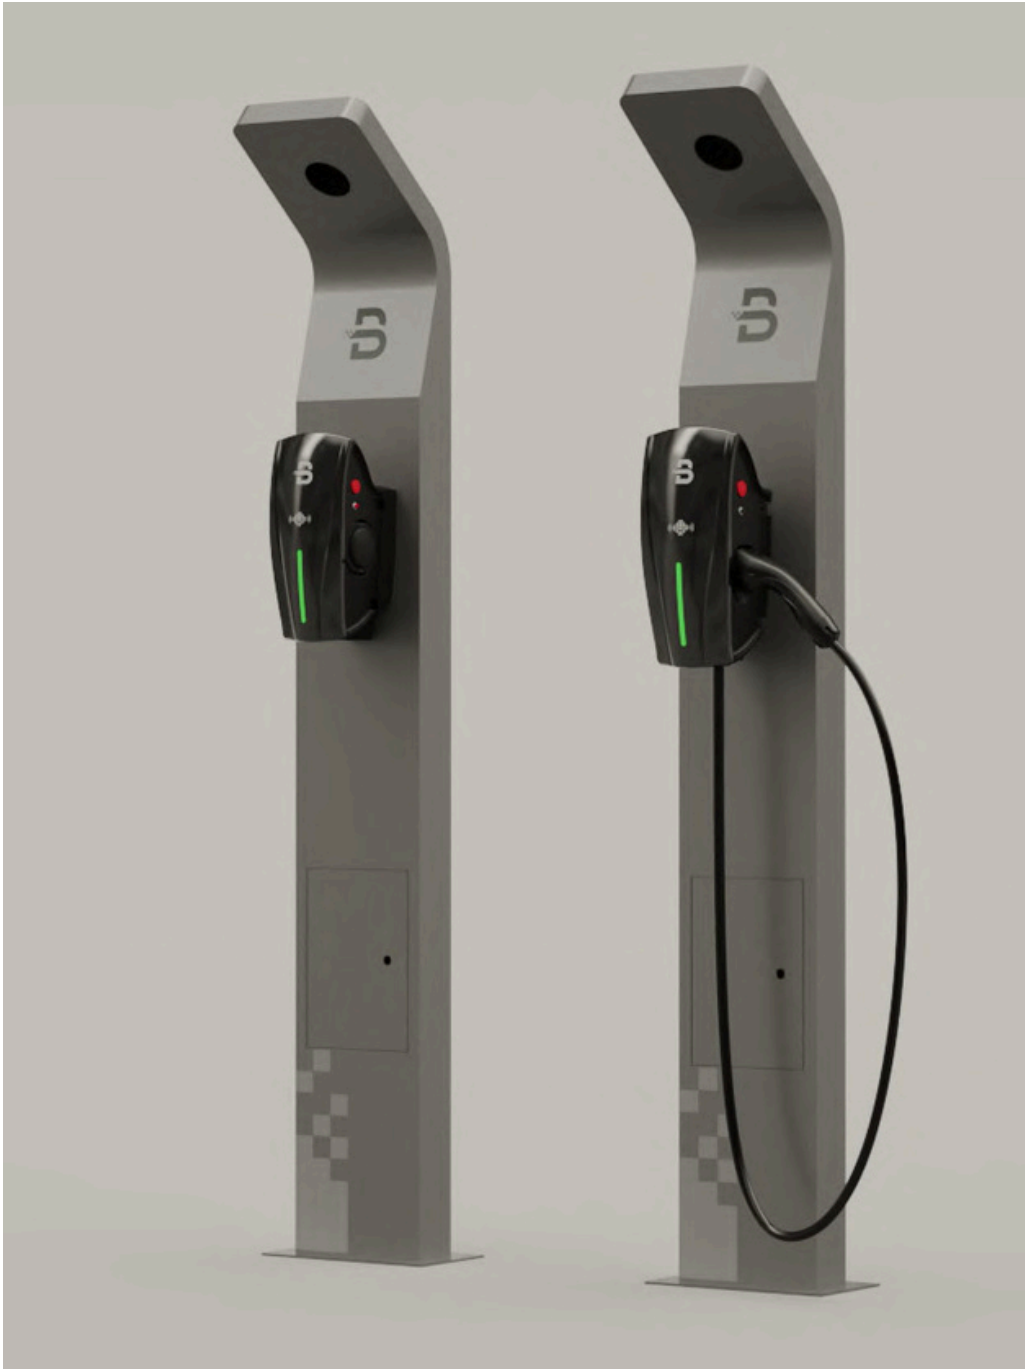

Code

0664/00014

<b>Categorization</b>	Smart Version
<b>Maximum Power</b>	7.4kW
<b>Input Voltage / Output voltage</b>	AC230 1-Phase
<b>Input Frequency</b>	50/60Hz
<b>Meter</b>	Metering Chip
<b>Display</b>	LED Lights
<b>RFID</b>	Yes
<b>DLB</b>	No
<b>Wi-Fi</b>	Yes
<b>APP</b>	Yes
<b>Bluetooth</b>	Yes
<b>Over Voltage &amp; Under Voltage Protection</b>	Yes
<b>Emergency Stop</b>	Yes
<b>Over Current Protection</b>	Yes
<b>CP Signal Short Circuit Protection</b>	Yes
<b>Over Temperature Protection</b>	Yes
<b>Lightning Protection</b>	Yes
<b>Contactor Adhesion Protection</b>	Yes
<b>Protection Degree</b>	IP65
<b>Efficiency</b>	about 100%
<b>Working humidity</b>	95% non-condensing



<b>Environment Temperature</b>	-25°C~+55°C
<b>Storage temperature</b>	-40°C~+85°C
<b>Maximum Altitude</b>	<2000m
<b>Input Current</b>	32A
<b>Socket Type</b>	/
<b>Maximum Output Current</b>	32A
<b>Cable length</b>	6 m (Supports customization of other lengths)
<b>Standards</b>	IEC61851-1, IEC61851-21-2
<b>User management</b>	Bluetooth / Wifi / Smart APP
<b>Starting</b>	Auto-start standard / RFID card